

AD-A147 450

INTENSE EXCITATION SOURCE OF BLUE-GREEN LASER(U)
HAMPTON UNIV VA DEPT OF PHYSICS AND ENGINEERING STUDIES
K S HAN 15 OCT 84 N00014-80-C-0957

1/1


UNCLASSIFIED

F/G 20/5

NL



END
DATE
FILMED
12-84
DTIC



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

12

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER Int. Acc. No. 7	2. GOVT ACCESSION NO. AD-A147450	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Annual Summary Report of Intense Excitation Source of Blue-Green Laser		5. TYPE OF REPORT & PERIOD COVERED Annual summary Report Oct. 1, 83 to Sept 30, 84
7. AUTHOR(s) Kwang S. Han		6. PERFORMING ORG. REPORT NUMBER
PERFORMING ORGANIZATION NAME AND ADDRESS Hampton University, Dept. of Physics and Engineering Studies, hampton, VA 23668		8. CONTRACT OR GRANT NUMBER(s) N00014-80-C-0957
CONTROLLING OFFICE NAME AND ADDRESS Office of Naval Research Washington, D.C. 20360		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 6115N RR011-09-01, 1-12 NR012-753
MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		12. REPORT DATE October 15, 1984
		13. NUMBER OF PAGES 7
		15. SECURITY CLASS. (of this report)
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
1. DISTRIBUTION STATEMENT (of this Report) Disbribution unlimited After Approved for public release		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report) Unlimited (Same abstract as the report)		
18. SUPPLEMENTARY NOTES DTIC NOV 01 1984 E		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Optical pumping, Hypocycloidal pinch, Terbium Laser, Sense plasma focus		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) An Intense Excitation Source of Blue-Green Laser Under ONR grant an intense excitation of blue-green laser useful for underwater communication and detection system being developed. The source in use, hypocycloidal-pinch plasma (HCP), can produce near uv photons which match the absorption spectra of solid state blue-green laser such as Tb:YLF and dye lasers. The optical pumping method is efficient and simple for		

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE

S/N 0102-LF-014-6601

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

84 11 05 097

AD-A147 450

DTIC FILE COPY

exciting short pulse lasers repetitively without coupling capacitor energy directly the laser medium.

During the previous project year, the device demonstrated successful pumping of the blue-green dye (LD490) laser with a peak power of 230kW. The laser pulse repetition rate was limited to 0.5 pulse per second due to the limited current (70mA) of the power supply used (See publication 4). Furthermore the characterization and optimization experiment on both laser system and the HCP device have been carried out extensively (See publication 5,6,7,8 and 9).

In order to accomplish a better coupling of uv light from HCP to pumpband of LD 490 dye laser, the following dyes are mixed with LD 490 dye respectively: Exciton dye BBQ, LD390, and NPO etc. In another words LD490 dye acts as the lasing medium while other dyes mentioned above as a spectrum converter. At present time experimental result shows that BBQ dye increases the laser output energy of LD490 dye by about 200% as compared with that of LD490 alone. On the other hand LD390 and NPO dyes decrease the laser output energy. For the reproducibility of the experimental results mentioned above, tests are still in progress.

Since the considerable amount of uv pumping light from the HCP has been attenuated before it actually reaches the laser gain medium and also uv light loss through the quartz window and the reflecting mirror, our HCP uv pumping light has not been exceeded the threshold level of Tb rod and uv dye laser (See publication 8). In order to circumvent these problems, a new geometry of the plasma focus device as shown in figure 1 is designed and constructed.

The new pump source as shown in figure 1, utilizes an elliptical-cylinder mirror for collecting the radiation from the dense plasma focus (DPF) and line-focussing on the axis of the laser tube. The new plasma pump source is expected to produce a plasma density of 10^{18} cm^{-3} and temperature of 10eV which is an extremely intense UV source. Figure 2 shows the experimental setup currently operating. In order to measure the speed of current sheet formed during the rundown phase, two photodetectors are placed at A and B. Another two photodetectors are also placed near the axis of the plasma line focussing as shown in Figure 2. Consequently the velocity of current sheet near the formation of plasma focussing will be measured. Figure 3 shows a typical oscillogram picture of light signal detected at A and B. Lower trace is for the location at A and upper one for B. The operating conditons of the plasma pumping source are argon fill pressure 1 Torr, an applied voltage 17.5KV and capacitance of capacitor 50uF. With these preliminary data the velocity of current sheet calcaulted from distance between 1st peak positions of upper and lower traces, is $2 \times 10^6 \text{ cm/s}$.

For further optimization of the new plasma pump source, the measurement of the emission spectra in the 200-400nm range will be continued as a function on operating conditions such as input energy, voltage, gas type, and pressure before uv dye laser pumping.

Annual Summary Report
of
Intense Excitation Source of Blue-Green Laser

under
(ONR Grant No. N00014-80-C-0957)

Principal Investigator

Kwang S. Han

Oct 15, 1984

Hampton University

Hampton, Va 23668

Acquisition For	
ADVISORY	<input checked="" type="checkbox"/>
RESEARCH	<input type="checkbox"/>
TECHNICAL	<input type="checkbox"/>
Other	
Distribution/	
Availability Codes	
Dist. Statement/	
Dist. Statement	



Annual Summary Report
of
An Intense Excitation Source of Blue-Green Laser

Under ONR grant an intense excitation of blue-green laser useful for underwater communication and detection system being developed. The source in use, hypocycloidal-pinch plasma (HCP), can produce near uv photons which match the absorption spectra of solid state blue-green lasers such as Tb:YLF and dye lasers. The optical pumping method is efficient and simple for exciting short pulse lasers repetitively without coupling capacitor energy directly the laser medium. *his work reports on the progress made*

During the previous project year, the device demonstrated successful pumping of the blue- green dye (LD490) laser with a peak power of 230kW. The laser pulse repetition rate was limited to 0.5 pulse per second due to the limited current (70mA) of the power supply used (See publication 4). Furthermore the characterization and optimization experiment on both laser system and the HCP device have been carried out extensively (See publication 5,6,7,8 and 9).

In order to accomplish a better coupling of uv light from HCP to pumpband of LD 490 dye laser, the following dyes are mixed with LD 490 dye respectively: Exciton dye BBQ, LD390, and NPO etc. In another words LD490 dye acts as the lasing medium while other dyes mentioned above as a spectrum converter. At present time experimental result shows that BBQ dye increases the laser output energy of LD490 dye by about 200% as compared with that of LD490 alone. On the other hand LD390-and NPO dyes decrease the laser output energy. For the reproducibility of the experimental results mentioned above, tests are still in progress.

Since the considerable amount of uv pumping light from the HCP has been attenuated before it actually reaches the laser gain medium by the loss through the quartz window and the reflecting mirror, our HCP uv pumping light has not been exceeded the threshold level of Tb rod and uv dye laser (See publication 8). In order to circumvent these problems, a new geometry of the plasma focus device as shown in figure 1 is designed and constructed.

The new pump source as shown in figure 1, utilizes an elliptical- cylinder mirror for collecting the radiation from the dense plasma focus (DPF) and line-focussing on the axis of the laser tube. The new plasma pump source is expected to produce a plasma density of 10^{18} cm^{-3} and temperature of 10eV which is an extremely intense UV source. Figure 2 shows the experimental setup currently operating. In order to measure the speed of current sheet formed during the rundown phase, two photodetectors are placed at A and B. Another two photodetectors are also placed near the axis of the plasma line focussing as shown in Figure 2. Consequently the velocity of current sheet near the formation of plasma focussing will be measured. Figure 3 shows a typical oscillogram picture of light signal detected at A and B. Lower trace is for the location at A and upper one for B. The operating conditons of the plasma pumping source are argon fill pressure 1 Torr, an applied voltage 17.5kV and capacitance of capacitor 50 F. With these preliminary data the velocity of current sheet calcaulted from distance between 1st peak positions of upper and lower traces, is $2 \times 10^6 \text{ cm/s}$.

For further optimization of the new plasma pump source, the measurement of the emission spectra in the 200-400nm range will be continued as a function on operating conditions such as input energy, voltage, gas type, and pressure before uv dye laser pumping.

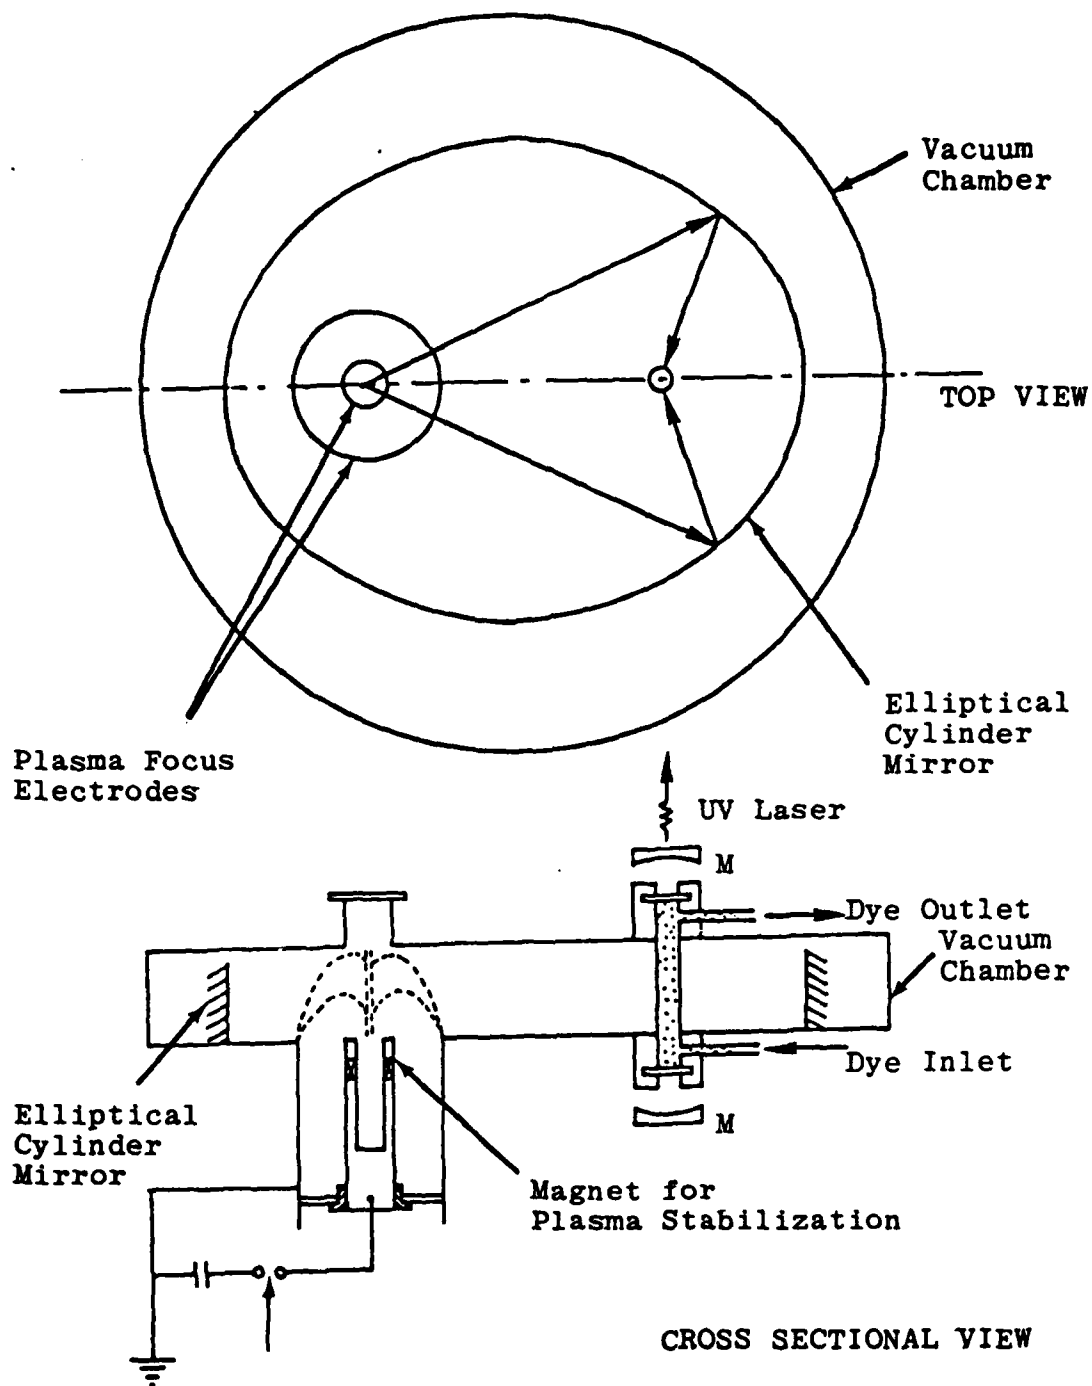


Figure 1. A schematic diagram of plasma pumping source for short wavelength lasers.

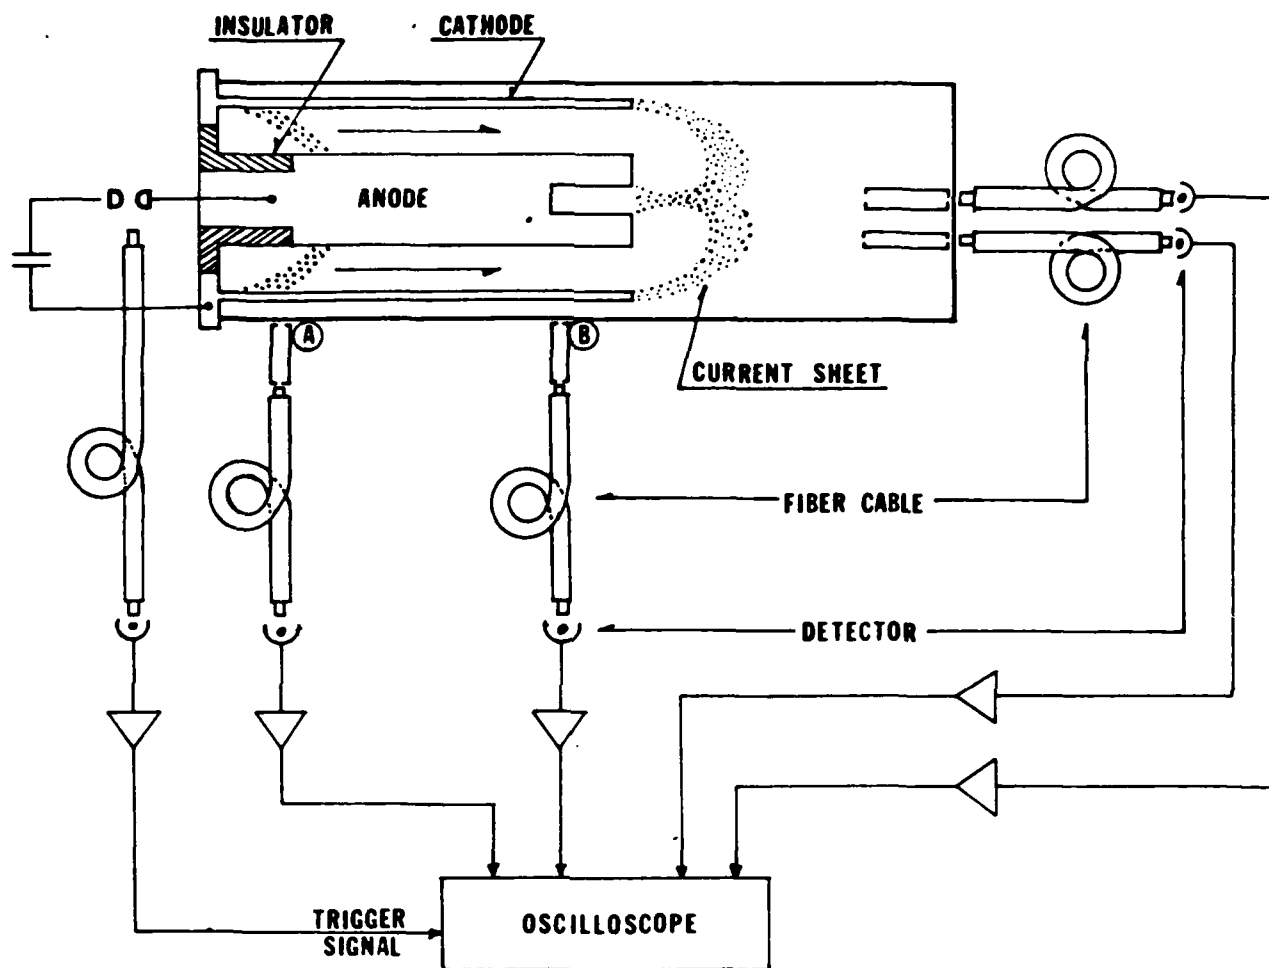


Fig. 2. Schematic diagram for the speed measurement of current sheet in the plasma pumping source.

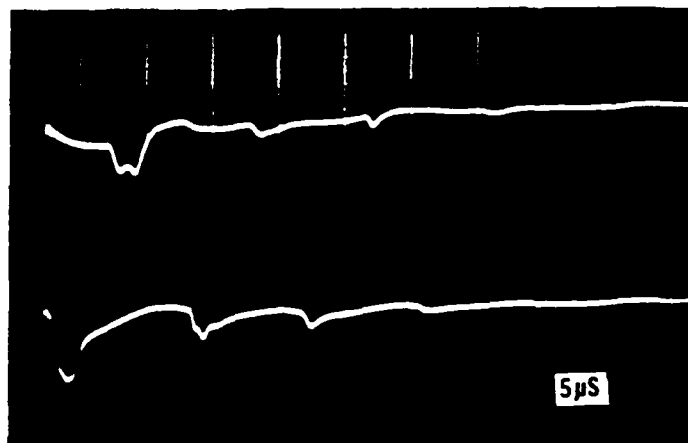


Fig. 3. Oscillogram of the light signals generated by current sheet in the plasma pumping source. Lower and upper traces are signals detected at the position A and B as shown in Fig.2. Ar fill pressure = 1 Torr, $E_0 = 17.5\text{KV}$, $C = 50\text{ }\mu\text{F}$.

List of Publications
generated Oct. 1, 1984 - Dec. 31, 1984
under ONR grant (N00014-80-C-0957)

1. "Visible Emission of Hypocycloidal-Pinch Plasma" K. S. HAN, D. D. Venable, and J. H. Lee, Conf. Record IEEE 81CH1640-2 NPS, P.156 (1981).
2. "Dye Laser Pumped by Hypocycloidal Pinch (HCP) Discharge", K. S. Han, C. H. Oh, D. D. Venable, and J. H. Lee, Conf. Record IEEE28CH147-1, P. 182 (1982).
3. "Near uv Emission of Hypocycloidal-Pinch (HCP) Discharge", K. S. Han, D. K. Park, D. D. Venable, and J. H. Lee, Bull. of APS. Vol. 27, 1063 (1983).
4. "High Power Pumping Blue-Green Laser by Hypocycloidal-Pinch Plasmas", K. S. Han, S. H. Nam, and J. H. Lee, Journal of Applied Physics. 55, 4113 (June, 1984).
5. "Radiative Properties of Hypocycloidal Pinch Plasma for Optically Pumped Blue-Green Lasers", M. Niimura, K. S. Han, S. T. Ko, and J. H. Lee. To be submitted in Journal of Applied Physics for Publication in 1984.
6. "High Pressure Plasma Source for pumping Atomic Iodine Lasers", K. S. Han, D. K. Park, and J. H. Lee, Virginia Journal of Science. Winter issue (1985).
7. "Blue-Green Dye Laser Pumping by Hypocycloidal Pinch Plasma", S. H. Nam (M.S. Thesis Dec. 1983).
8. "Ultraviolet Emission of Hypocycloidal Pinch Plasma for Laser Excitation", S. T. Ko (M.S. Thesis Dec. 1983).
9. "Spectral Optimization of Hypocycloidal-Pinch Array as Laser Pump Source", J. H. Lee and K. S. Han, 1984 IEEE International Conference on Plasma Science Record.